


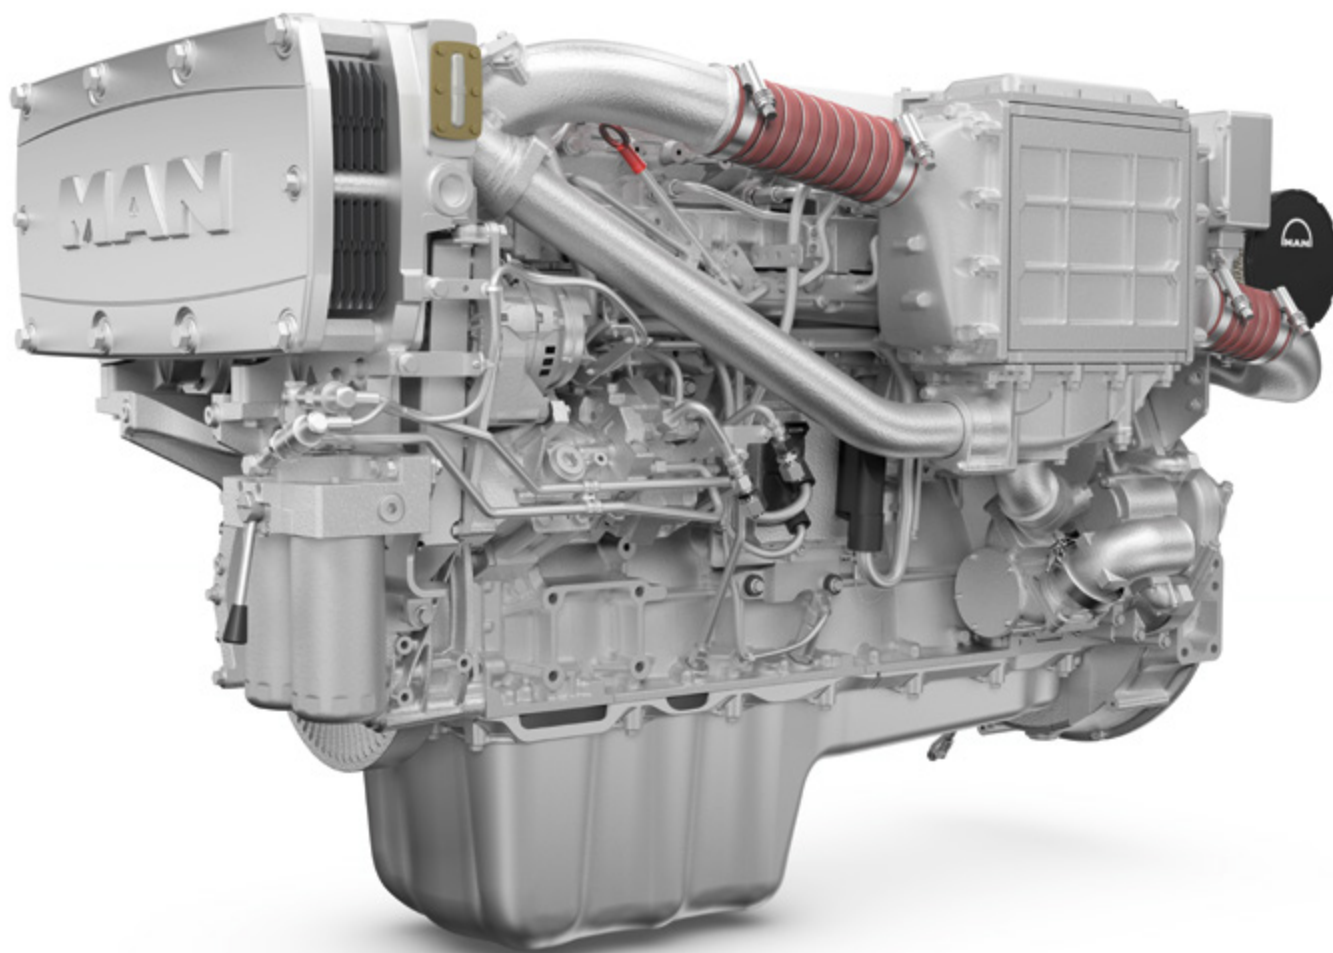

D2676

Engine description

Characteristics

- Cylinders and arrangement: 6 cylinders in-line
- Operation mode: 4-stroke diesel engine, watercooled
- Turbocharging: Turbocharger with charge air intercooler and waste gate
- Number of valves: 4 valves per cylinder
- Fuel system: Common Rail direct fuel injection with electronic control
- Engine lubrication: Closed system with forced feeding, oil cooling and filtering
- Type of cooling: Heat exchanger with engine and seawater circuit
- Engine control: Electronic injection control (EDC)
Electronic engine monitoring including diagnostic unit
- Fuel: DIN EN 590

D2676

Technical data





Technical features D2676

Type designation		LE 443	LE 423
Displacement	l	12.42	12.42
Maximum output to DIN ISO 3046-1	kW (hp)	537 (730)	588 (800)
Rated speed	rpm	2,300	2,300
Maximum torque	Nm	2,445	2,674
at speed	rpm	1,300–2,100	1,400–2,000
Absolute fuel consumption at rated power ¹⁾	l/h	142	158
Classifiable		✓	–
Exhaust gas status		IMO Tier 2, EPA Tier 3 RCD 2013/53/EC, 97/68/EC	IMO Tier 2, EPA Tier 3 ²⁾ , RCD 2013/53/EC, 97/68/EC

1) Tolerance +5% according to DIN ISO 3046-1

2) For private use only

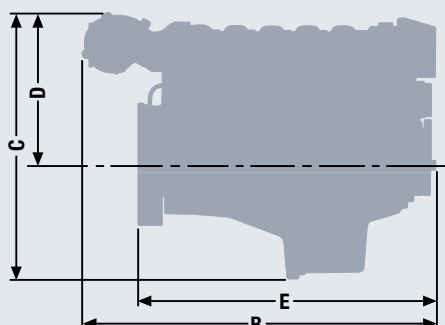

Dimensions D2676

Type designation		LE 443/ LE 423
A-Overall width	mm	922
B-Overall length	mm	1,800
C-Overall height – standard oil pan	mm	1,103
D-Top of engine to crankshaft centre	mm	704
E-Length of engine from front end to edge of flywheel housing	mm	1,532
Average weight of engine ready for installation (dry)	kg	1,215

For detailed examinations of installation dimensions, please order drawings from our factory.


D2676

Power charts




light duty


D2676 LE 443

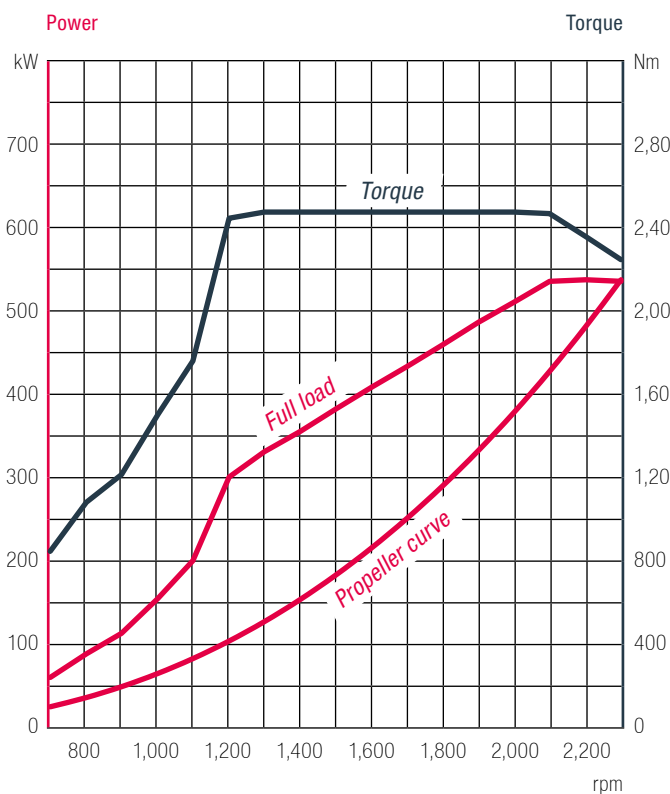

D2676 LE 423

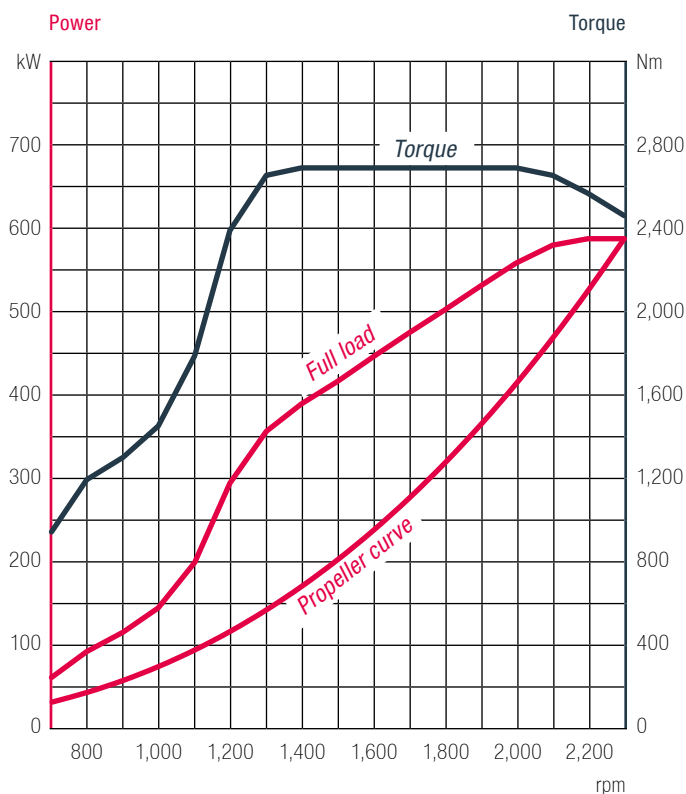

Absolute fuel consumption

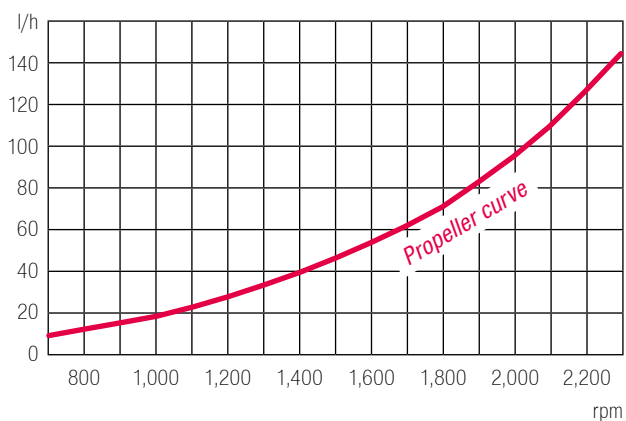

Absolute fuel consumption

